




item number	A (mm)	thickness of metal sheet (t) (mm)	length L (m)	number of perforation rows	surface finish
MP 41X21X2.5_S3	21	2,5	3	1	S
MP 41X21X2.5_F3	21	2,5	3	1	F
MP 41X21X2.5_ZM3	21	2,5	3	1	ZM
MP 41X21X1.5_S3	21	1,5	3	1	S
MP 41X21X1.5_S2	21	1,5	2	1	S
MP 41X41X2.5-3P_S3	41	2,5	3	3	S
MP 41X41X2.5-3P_F3	41	2,5	3	3	F
MP 41X41X2.5-3P_ZM3	41	2,5	3	3	ZM
MP 41X41X2.5_ZM3	41	2,5	3	1	ZM
MP 41X41X2.5_ZM6	41	2,5	6	1	ZM

product description: The mounting profile is suitable for creating a support beam for cable routes suspended on threaded rods or for assembling a supporting structure using mounting accessories (VS).
The cable tray or cable ladder is fixed to mounting profile using NSM 6X20 bolts and PVL washers.
The wire tray is fixed to mounting profile using the DZS connector.
The MP 41X21X2.5 mounting profile can be terminated with the OKSPL end cap.
The MP 41X41X... mounting profile can be terminated with the OKSPS end cap.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 55 µm (min. 45 µm)
ZM - Magnelis® - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

classification 🔥: ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90
Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: ČSN EN 60721-3-1

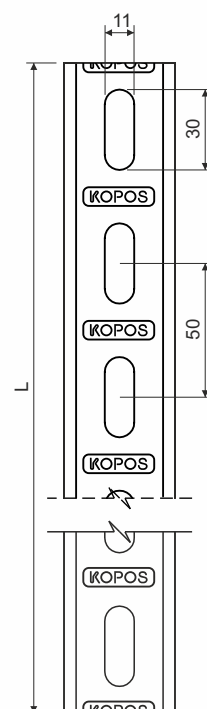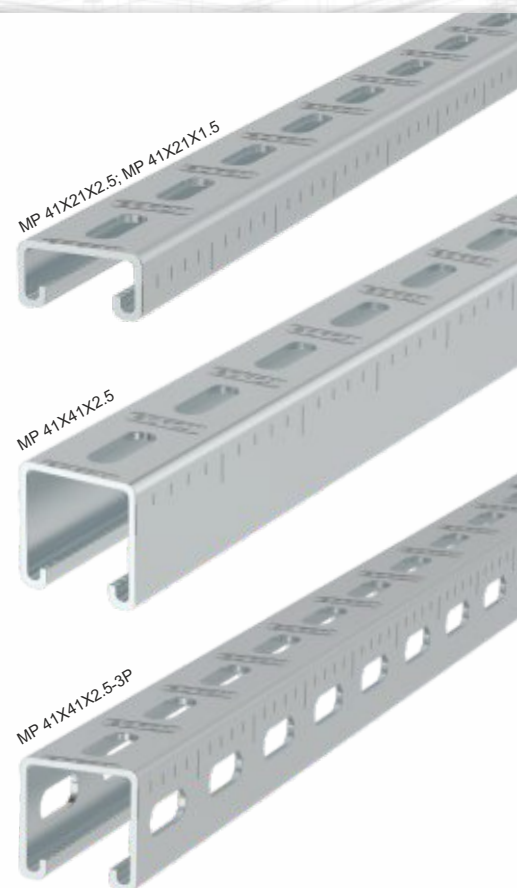

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



mounting profile