

type number: **NP 30X15X1.20_S**
NP 30X15X1.20_ZM

thickness of metal sheet: 1,2 mm

product description: The load bearing profile is designed for supporting a cable route on threaded rods or for cable route formed by PKC cable clamps.

Load bearing profile + threaded rods:

The load bearing profile is fixed by using two threaded rods ZT 8 + nuts M 8 + washers PD 8.

NSM 6X10 bolts are used to attach the cable tray to the load bearing profile.

The load bearing profile is recommended for a route width of max. 300 mm.

Max. load for one mounting point is 100 kg

Load bearing profile + PKC clamps:

PKC clamps are used for cable fastening.

The load bearing profile is fixed by using anchor KPO 6 or bolt SB 6.3X35.

Possibility to use vertical cable routes.

ZM surface finish load bearing profile shall be used for ZM or F surface finish trays.

surface finish: S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm

ZM - Pre-Galvanized steel with admixture of magnesium and aluminum according to ČSN EN 10346, ČSN EN 10143, protective layer 18-31 µm (replacement of hot dip galvanizing)

sales amount: 2 m

meets the requirements: ČSN EN 61537:02

classification :



ČSN 73 0895 P 90-R

DIN 4102-12 E 90

STN 92 0205 PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Cable management systems - Fire resistant systems.

storage: ČSN EN 61537:02

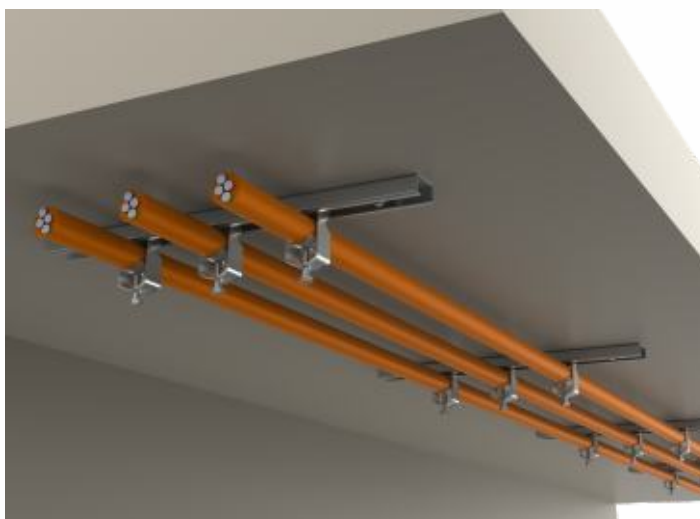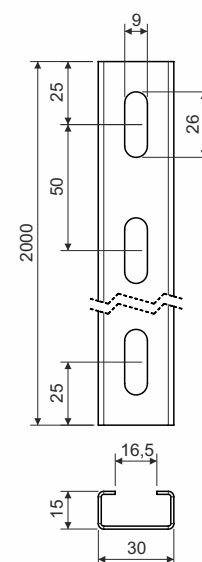

 WARNING**Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:

