


item number	A (mm)	H (mm)	B (mm)	C (mm)	thickness of metal sheet (mm)	
VOH 50_S					0,55	🔥🔥
VOH 50_F	55	12	453	224	0,80	🔥🔥
VOH 50_ZM					0,75	🔥🔥
VOH 62_S	66	12	379	182	0,55	🔥
VOH 62_F					0,80	🔥
VOH 75_S	80	12	478	224	0,55	🔥🔥
VOH 75_F					0,80	🔥🔥
VOH 100_S					0,55	🔥🔥
VOH 100_F	105	12	503	224	0,80	🔥🔥
VOH 100_ZM					0,75	🔥🔥
VOH 125_S	130	12	442	182	0,55	🔥
VOH 125_F					0,80	🔥
VOH 150_S	155	12	553	224	0,55	🔥🔥
VOH 150_F					0,80	🔥🔥
VOH 200_S					0,80	🔥🔥
VOH 200_F	205	12	603	224	0,80	🔥🔥
VOH 200_ZM					0,75	🔥🔥
VOH 250_S	255	12	567	182	0,70	🔥
VOH 250_F					0,80	🔥
VOH 300_S					1,00	🔥🔥
VOH 300_F	306	12	703	224	1,00	🔥🔥
VOH 300_ZM					1,00	🔥🔥
VOH 400_S	406	15	803	224	1,00	🔥🔥
VOH 400_F					1,00	🔥🔥
VOH 500_S	506	15	903	224	1,00	🔥
VOH 500_F					1,00	🔥
VOH 600_S	606	15	1003	224	1,00	🔥
VOH 600_F					1,00	🔥

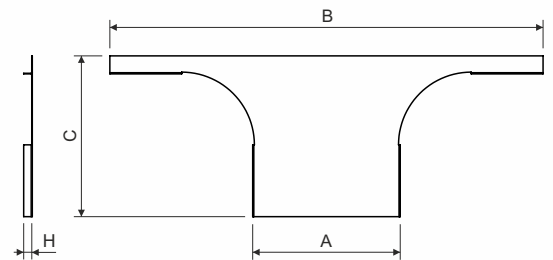

product description: This lid is used to cover horizontal branches or branches created using reduction parts. To fix the cover use 4 pcs of cover fixtures VU. These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm
 GMT - non electrolytic plating, aluminum-zinc-layer 5-15 µm (equivalent Hot Dip Galvanized)
 ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90
 Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire
 🔥 products approved for standard constructions
 🔥 products approved for non-standard constructions

storage: ČSN EN 60721-3-1

