
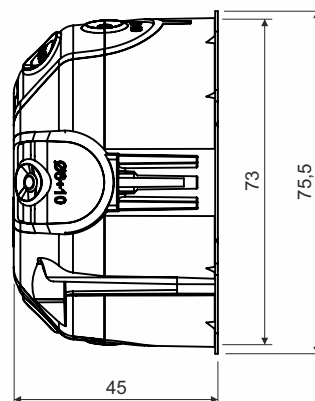


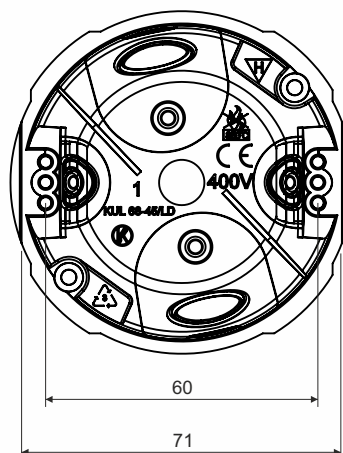

69dB


product description:

designed for distribution system with voltage 400 V and with maximum current 16 A
 designed for mounting into hollow walls (eg. walls of plasterboard)
 inlet openings made of flexible material
 marked inputs for sealing cables and pipes in the flexible material (6x 6-10 mm, 2x 20-25 mm)
 air-tightness even with inserted cable or pipe
 suitable for low energy and passive houses
 prevents airflow through the installation
 mounting screws with plastic foot are fitted with a twin self-tapping thread for quick installation
 instrument screws are tightened below the edge of the box
 extended edge situated for easy overlay installed device
 when mounting, it is not necessary to countersink the plasterboard edge
 possibility to insert screwless terminals
 when using box with the cover V 68, the IP protection is Ip30
 suitable for soundproof walls with maximum soundproofing $R_w = 69\text{dB}$

material: PVC (Pb Free)

color: yellow

self-snuffing: yes, within 30 s

temperature resistance: $-5 - +60\text{ }^{\circ}\text{C}$

flaming loop test: $850\text{ }^{\circ}\text{C}$

fire class for underlying material: A1-F

weight: 30 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

configuration: KUL 68-45/LD_NA - boxes fitted with screws for mounting into double wall and device screws - package: 100 pcs in boxes

accessories: cover V 68
 terminal plate S-66
 screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools: saw-drill VPT 68
 universal carrier VPTU

recycling codes:



box



feet



screws



carton

Warning:

Incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person.
Product damage - if the box is visibly damaged, stop using it.
Follow the manufacturer's installation instructions according to the installation instructions, videos.
Make sure the box is properly attached and secured to prevent accidental loosening.
Installing an unsuitable box can negatively affect the sound and thermal insulation of the room.
Under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers.