
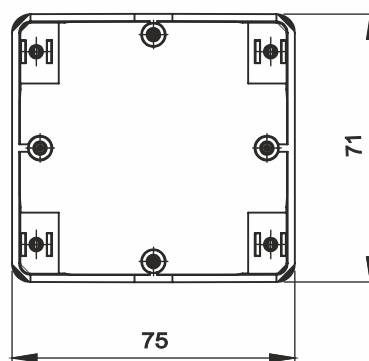


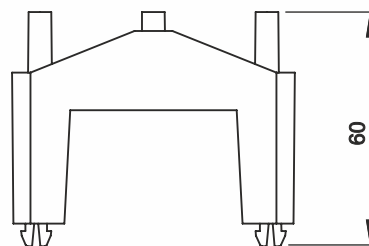

product description: it allows mounting of instrument into the parapet trunking PK 110X65 D, PK 130X65 D, PK 170X65 D, PK 210X70 D
 after removing the posts for the device screws (in the vertical axis), a double socket can be installed
 possibility of securing the box against displacement in the channel with a screw
 allows insertion of the SK 40X shielding channel

material: PC ABS

color: white

self-snuffing: yes, within 30 s

temperature resistance: -25 - +90 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 28 g

meets the requirements: ČSN EN 50085-1:06, ČSN EN 50085-2-1:07

storage: ČSN 64 0090



package: 10pcs / 80pcs = foil / carton

recycling symbols:



instrument box PC ABS



packaging film



carton

Risks Associated with Product Use:

During installation, use appropriate protective work equipment and follow safety guidelines

Use the product only for the purposes intended by the manufacturer

Use the product in an environment that complies with the manufacturer's instructions

Do not use the product if it is damaged

Follow the manufacturer's recommendations and do not exceed the number of inserted cables or the product's load capacity

After installation, check the correctness of the mounting of trunkings and covers according to the manufacturer's recommendations