


type number: **DSS_S**

product description: The DSS is used to fasten the threaded rod to a roof structure with a slight inclination.
The bracket is designed for use with the ZT 8 or ZT 10 threaded rod.
The bracket is fixed to the ceiling with an anchor $\varnothing$ 8 or 10 mm.

max. load: 1 kN

surface finish: S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 μ m

storage: ČSN EN 60721-3-1

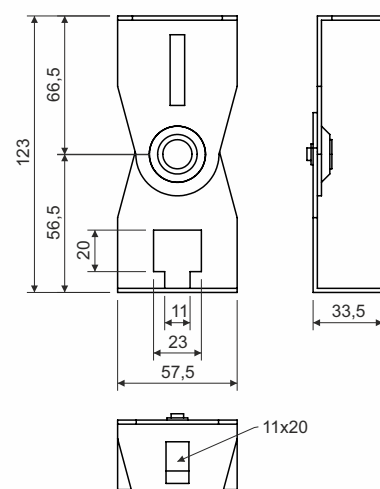

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



DSS