

type number	A	max. load (kg)	weight (kg/pc)
LTS 100_S	163	150	0,34
LTS 150_S	213	120	0,40
LTS 200_S	263	110	0,46
LTS 300_S	363	75	0,59
LTS 400_S	463	50	0,75
LTS 500_S	563	-	0,82
LTS 600_S	663	-	0,94

product description: This bracket is used to fasten cable trays running through cable trays or cable ladders to the wall.

The cable tray is fastened using NSM 6X10 bolts. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with an F surface finish.

The clamp is fastened to the ceiling using KPO 10X95 anchors or KKZ 10 anchors, S 10X40 bolts and PD 10 washers.



To eliminate deformation during assembly the STS reinforcement is designated.

LTS 500 and LTS 600 brackets are used as ceiling profiles.

surface finish: S - Pre-Galvanized, zinc-layer 15 - 27 µm

sales amount: 1 pc

storage: EN 60721-3-1

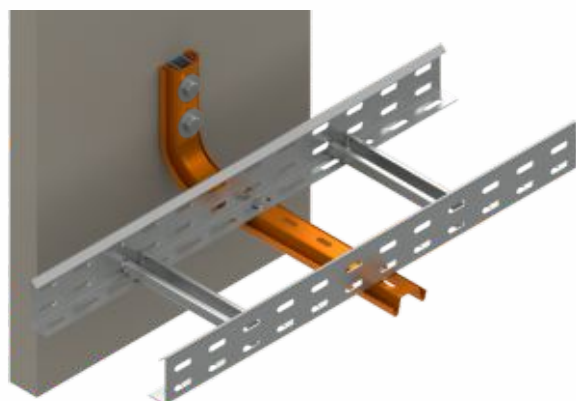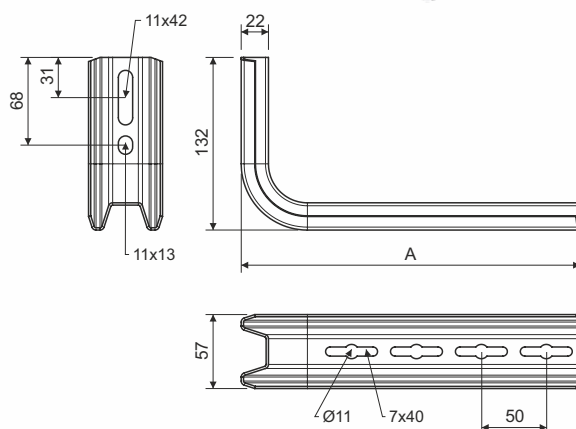

use reinforcements STS



bracket LTS used as ceiling profiles



**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



LTS