


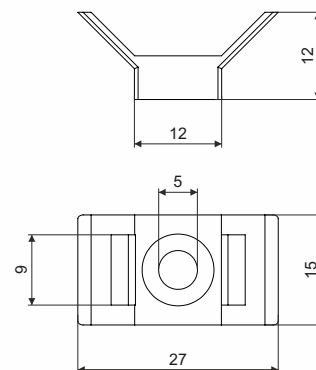

material: polyamide

halogen-free: YES

temperature resistance: -40 - +85 °C

product description: To fix the tie on the pad. Fire resistance according to UL 94 - V2.

Not long-term resistant to sunlight.

Fixing to pad using a screw.

Recommendation: clamps should be installed immediately after unpacking from the sealed bag. This will prevent unnecessary reduction in the level of humidity PA, which would result in a reduction in the clamp quality.

Installation

Instructions:

Secure the cable to the base using a Ø 3.5–5 mm screw. Thread a cable tie through the holes in the cable clamp and tighten it to secure the cable in place.

SPP 9_HA - package in foil bags of 100 pieces

recycling codes:



clip



foil

WARNING

risks associated
with product use:

during installation, use appropriate protective work equipment and follow safety guidelines
use the product only for the purposes intended by the manufacturer
use the product in an environment that complies with the manufacturer's instructions
do not use the product if it is damaged