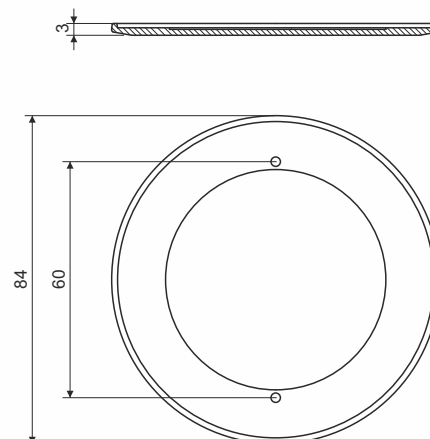



product description:

to cover the boxes with fixing spacing of 60 mm using fastening screws

for boxes under target: KP 68/D, KPR 68/D, KP 68-30, KP 68-45, KU 68-45, KPR 68-70, KP 68/2, KP 68, KPR 68KP 67/2, KP 67/3, KUH 1

for boxes into hollow walls: KUL 68-45/LD, KU 68/71 L1, KPRL 68-70/LD, KPR 68/71L, KI 68 L/1, KPL 64-40(45,50)/LD, KPRL 64-60/LD, KUH 1/L

material: PVC

color: white RAL 9003

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 15 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

V 68_HA - 100 pcs of covers packed in a bag, labeled; 400 pcs of covers packed in carton

recycling symbols:


lid



cardboard



foil

 WARNING
risks associated with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

product damage - if the lid is visibly damaged, stop using it

follow the manufacturer's installation instructions according to the installation instructions, videos

make sure the lid is properly attached and secured to prevent accidental loosening

under normal and foreseeable conditions of use, the installed lid does not pose any risks to consumers