


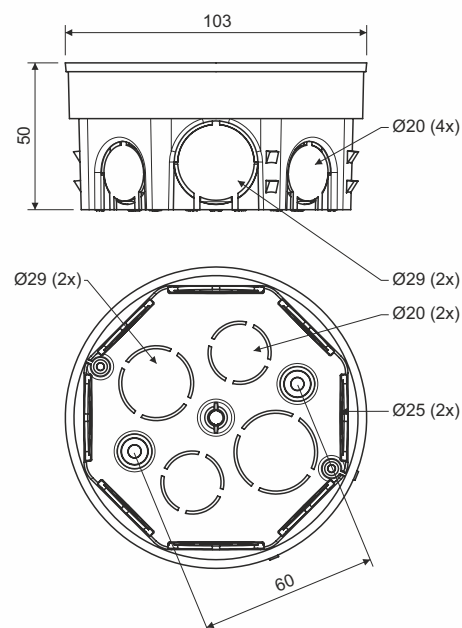

product description:

designed for distribution system with voltage 400 V and with maximum current 16 A
a large number of knockouts to make larger installations
projections against ripping the box out of the wall
sufficient space for terminal plate and circuit connection

material: PVC

color: gray

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 92 g

meets the requirements: EN 60 670-1

storage: ČSN 64 0090

KO 97/5_KA - 90 pcs of boxes with attached lids placed in a carton separately

accessories:

blind cover ZV 97
terminal plate S-96; SP-96
screwless terminal plates TYP015, TYP016, TYP017, TYP018
extending piece TN 97

recycling symbols:



box, cover



cardboard

 WARNING

risks associated with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person
follow the manufacturer's installation instructions according to the installation instructions and videos
damage to the product - if the box is visibly damaged, stop using it
under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers