


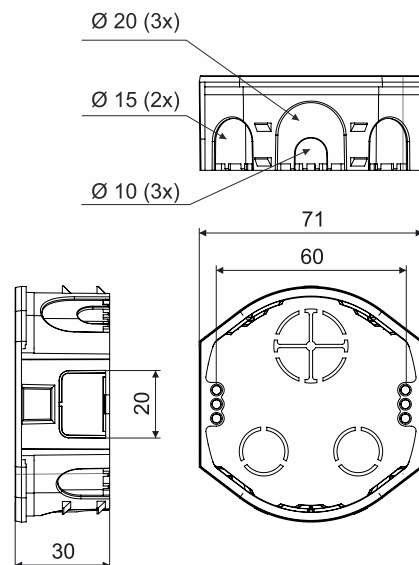

product description:

designed for distribution system with voltage 400 V
 possibility to join into continuous series with spacing of 71 mm
 boxes can be joined with boxes KPR 68/D, KP 68/D, KPR 68-70, KU 68-45
 allows to install double-socket
 allows the installation of wiring in thin partitions

material: PVC

color: gray

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 20 g

meets the requirements: ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

KP 68-30_KA - 150 pcs in carton separately, device screws inserted in package

accessories:

cover V 68
 blind cover ZV 68
 extending frames NR 5X5, NR 68/6, NR 68/10
 screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools:

non-hammered masonry cutter FR 68 SDS ($\varnothing 80$)

recycling symbols:



box



cardboard



screws

**WARNING**

risks associated with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person
 follow the manufacturer's installation instructions according to the installation instructions and videos
 damage to the product - if the box is visibly damaged, stop using it
 under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers