
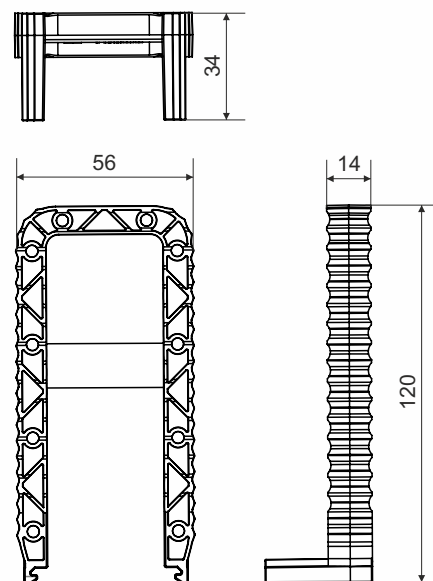


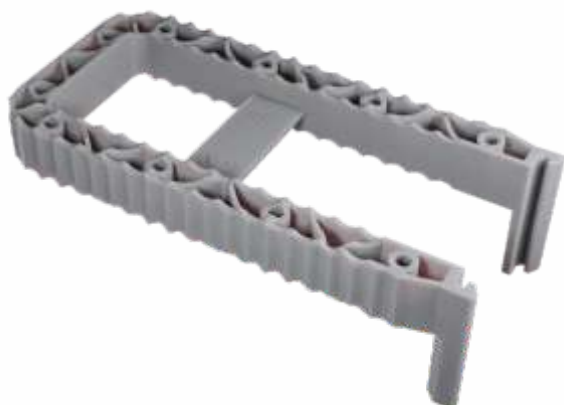

product
description:

for direct fixing of boxes to metal armature

can be mounted on all sides of SB-KP boxes

provides springing of the inserted assembly in the range of 15 to 30 mm or 30 to 50 mm, depending on the selected connection of the wing to the box

fixing of the mounting wings by using wire or tightening strips

material: PP (halogen-free)

colour: grey

temperature resistance: -25 - +60 °C (short-term +90 °C)

hot loop test: 650 °C

fire reaction class of the underlying material: A1

weight: 18 g

meets the requirements of: ČSN EN IEC 60 670-1 ed.2

storage: ČSN 64 0090

SB-MK 1_KB - 10 pcs in shrink wrap, 210 pcs packed in carton

recycling symbols



SB-MK 1



foil



cardboard



WARNING

Risks associated
with

product use:

incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

follow the manufacturer's installation instructions according to the installation instructions and videos

damage to the product - if the product is visibly damaged, stop using it

under normal and foreseeable conditions of use, the installed product does not pose any risks to consumers