

type number: **NS 40_S**
NS 40_ZM

thickness of metal sheet: 0,8 mm

product description: The coupling is used to connect NKZ 20X40 (NKZN 20X40) cable trays.

The connection is made by bolt NSMP 5X10. To protect the cables, the bolt head is inside the cable tray.

ZM surface finish coupling shall be used for F surface finish trays.



These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm
ZM - Pre-Galvanized steel with admixture of magnesium and aluminum according to ČSN EN 10346, ČSN EN 10143, protective layer 18-31 µm (replacement of hot dip galvanizing)

sales amount: á 1 pc

meets the requirements: ČSN EN 61537:02

storage: ČSN EN 60721-3-1

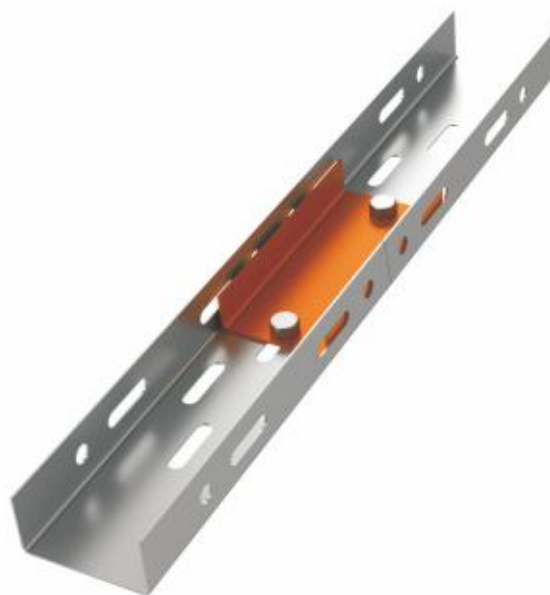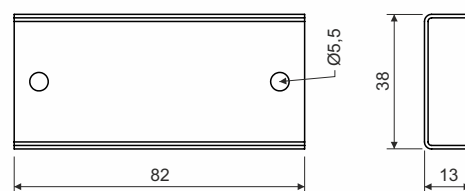

WARNING

Risk of injury from cutting

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NS 40