

type number:

PP 80/0_LB**PP 80/3_LB****PP 80/45_LB**

product description:

Device underlay is to be installed into the frame of the floor box KOPOBOX 80. Assembly is recommended together with the apparatus box KPP 80.

PP 80/0 - it is used for blanding unpopulated space in KOPOBOX 80 floor box frame.

PP 80/3 - serves for the assembly of up to 3 pcs of classic apparatuses

PP 80/45 - serve for assembly of up to 4 QUADRO modular instruments or instruments with compatible construction, e.g. those made by companies ABB, PEHA, Legrand, OBO Bettermann, Schneider Electric Altira. Is recommended to remove the partition by installation of multiple instrument.

material:

polyamide

color:

gray RAL 7012

self-snuffing:

yes, within 30 s

temperature resistance: -5 - +105 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F


sales amount: á 1 pc

certification:

ČSN EN 60607-1

storage:

ČSN 64 0090

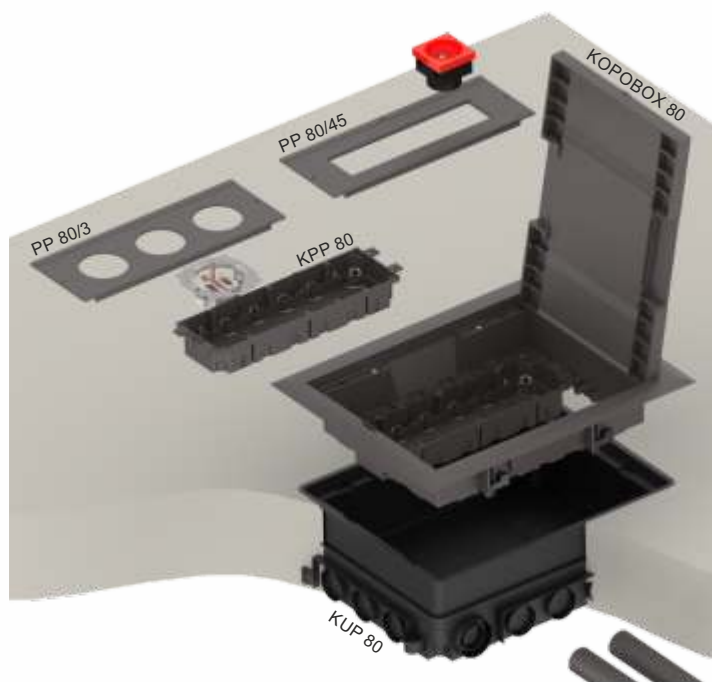

recycling symbols:



underlay



cardboard



screws



foil

**WARNING**

risks associated
with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

follow the manufacturer's installation instructions according to the installation instructions and videos

damage to the product - if the product is visibly damaged, stop using it

under normal and foreseeable conditions of use, the installed product does not pose any risks to consumers