


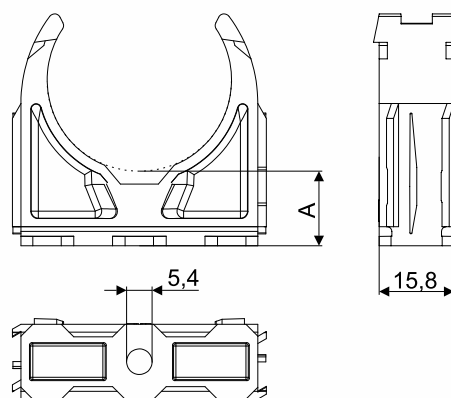

product description:

the clamps are designed to secure piping to walls by riveting or screwing
the pipe is installed by pressing it between the jaws of the clamp
the clamps are equipped with interlocking features that allow them to be slid together to form a continuous row of pipes, as well as grooves for installation in the 5820/xx series support rails
for sizes 40 and above, the clamps are secured from above with securing bracket TR 53xxHF
two shot-fixing holes are provided for 11 mm and 16 mm shot-fixing tool nosepieces (5316EHF_xxP: 11 mm hole only)
shot-fixing tool: SPIT PULSA, CELO FORCEONE+, HILTI BX 4-22 ME (nosepiece X-FG B4-ME)

material: PP

halogen-free: YES

color: black, white, light grey, dark grey

self-extinguishing: flame-retardant

glow-wire test: 650°C

temperature resistance: -45 - +90 °C

fire class for underlying material: A1-F

UV stable: NO

shot fixing: YES

classification code according to EN 61386-25: 2452410

meets the requirements: ČSN EN 61386-25;2012; ČSN EN 61386-1 ed. 2;2009

storage: ČSN 64 0090



recycling codes:



clamps



fóil



carton

 WARNING

risks associated with product use:

during installation, use appropriate protective work equipment and follow safety guidelines
use the product only for the purposes intended by the manufacturer
use the product in an environment that complies with the manufacturer's instructions
do not use the product if it is damaged
follow the manufacturer's recommendations and do not exceed the number of inserted cables

item number	outer Ø pipe (mm)	A (mm)	weight (g/pc)	package (pcs)	colour	for flexible pipes	for rigid pipes
5316EHF_FBP	16	14,5	4	10 / 100 / 400	black	1216EHFPP 1216E 1216EICE 1416E	1516EHF
5316EHF_HBP	16	14,5	4	10 / 100 / 400	white		4016EHF
5316EHF_KBP	16	14,5	4	10 / 100 / 400	light grey		8016EHF
5316EHF_LBP	16	14,5	4	10 / 100 / 400	dark grey		1516E 4016E 8016E
5320HF_FBP	20	14,5	5	10 / 100 / 300	black	1220HFPP 1220 1220ICE 1420	1520HF
5320HF_HBP	20	14,5	5	10 / 100 / 300	white		4020HF
5320HF_KBP	20	14,5	5	10 / 100 / 300	light grey		8020HF
5320HF_LBP	20	14,5	5	10 / 100 / 300	dark grey		1520 4020 8020
5325HF_FBP	25	15,0	7	10 / 100 / 600	black	1225HFPP 1225 1225ICE 1425	1525HF
5325HF_HBP	25	15,0	7	10 / 100 / 600	white		4025HF
5325HF_KBP	25	15,0	7	10 / 100 / 600	light grey		8025HF
5325HF_LBP	25	15,0	7	10 / 100 / 600	dark grey		1525 4025 8025
5332HF_FBP	32	15,5	8	10 / 660	black	1232HFPP 1232 1232ICE 1432	1532HF
5332HF_HBP	32	15,5	8	10 / 660	white		4032HF
5332HF_KBP	32	15,5	8	10 / 660	light grey		8032HF
5332HF_LBP	32	15,5	8	10 / 660	dark grey		1532 4032 8032
5340HF_FBP	40	15,5	11	10 / 440	black	1240HFPP 1240 1240ICE 1440	1540HF
5340HF_HBP	40	15,5	11	10 / 440	white		4040HF
5340HF_KBP	40	15,5	11	10 / 440	light grey		8040HF
5340HF_LBP	40	15,5	11	10 / 440	dark grey		1540 4040 8040
5350HF_FBP	50	15,5	15	10 / 660	black	1250HFPP 1250 1250ICE 1450	1550HF
5350HF_HBP	50	15,5	15	10 / 660	white		8050HF
5350HF_KBP	50	15,5	15	10 / 660	light grey		1550
5350HF_LBP	50	15,5	15	10 / 660	dark grey		4050 8050
5363HF_FBP	63	15,5	20	10 / 200	black		1563HF
5363HF_HBP	63	15,5	20	10 / 200	white		8063HF
5363HF_KBP	63	15,5	20	10 / 200	light grey		1563
5363HF_LBP	63	15,5	20	10 / 200	dark grey		4063 8063